
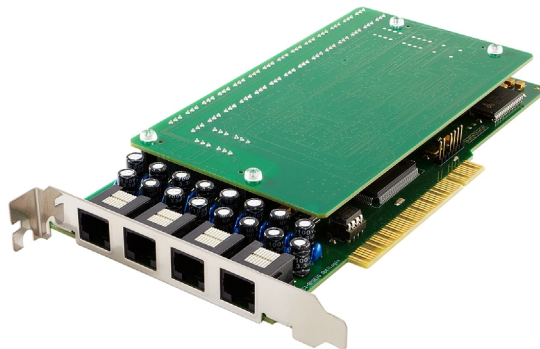


HyperPCI series Voice Recording Boards

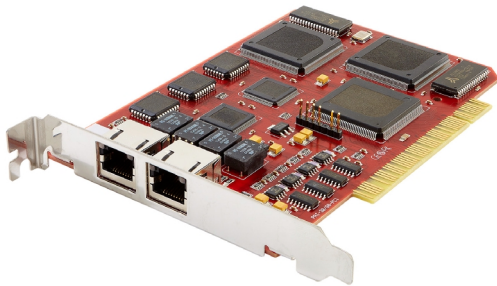

The OptiLogix HyperPCI OEM Voice Recording boards provide powerful features for building advanced Call Recorders.

Each card only occupies a single standard 5V PCI slot and combines a compact form factor with very low power consumption resulting in unmatched reliability.

On-board DSPs and large streaming buffers impose very little demand on system and application resources.

D-channel signalling supports Call Setup, Connect, Clear, DDI number and CLI number decoding.

Supports all major ISDN variants, Q.SIG, DASS-2 and DPNSS.

Simultaneous recording on all channels of both upstream and downstream sides of a conversation or optionally recording the audio streams separately (stereo).



Features and Benefits

High density half length PCI card

Non intrusive and undetectable high impedance passive monitoring

Dialled number and Caller ID signalling support

Models available for PRI-ISDN, BRI-ISDN / S₀ bus, Digital handsets and Analog handset / trunk lines

Digital Signal Processors for voice streaming and on-board D-channel protocol processing

4, 8 and 16 channel Analog, Digital handset and S₀ bus models

Fractional, 30 and 60 channel PRI-ISDN / E1 models

23 channel and 46 channel T1-ISDN models

Protocol support for all major ISDN variants, Q.SIG, DASS-2 and DPNSS

Analog models support DTMF, FSK Caller ID, AGC and audio detection

Digital models support all major PBX with highly accurate DigitalVox start/stop triggering

Uses the OptiLogix generic API and driver. Fully supported by HyperEngine

Supports Server 2003, 2008, 2012, Server 2016, Windows 7, Windows 8 and Windows 10

Supports 64kbit/s A-law and high quality compressed 36kbit/s speech encoding

CE, FCC and RoHS 3 compliance

Technical Specifications

Mechanical characteristics:	Half length standard 5V PCI card
Operating temperature:	0 °C to +60°C
Humidity:	5% to 80% non-condensing
Maximum power requirements:	+5Vdc (1 A), +12Vdc (50 mA), -12Vdc (20 mA)
Operating systems:	All 32-bit and 64-bit Windows Operating Systems
Boards per system:	Mix of 12 boards or 720 ports total

Interface Specifications

Primary Rate interface:	E1 (2.048Mbit/s), T1 (1.544Mbit/s)
AC impedance:	1100 Ω
Maximum tap length:	10 m (unterminated), 100 m (terminated)
Protocols:	All major ISDN variants, Q.SIG, DASS-2 and DPNSS
Basic Rate interface:	4 wire S ₀ bus
AC impedance:	Line Matched
Maximum tap length:	500 m
Protocols:	Euro-ISDN
Digital handset interface:	2 wire bus
AC impedance:	Line Matched
Maximum tap length:	500 m
Protocols:	All major PBX supported (DigitalVox triggering)
Analog handset / trunk interface:	2 wire voltage start or line level audio triggering (Vox)
DC/AC impedance:	Infinite / 3000 Ω
Maximum tap length:	5000 m
Signalling:	Ring detection, voltage detection, DTMF detection for dialled numbers, FSK Caller ID detection, voice activity detection

Audio Processing

Voice and Silence detection:	Programmable from OptiLogix API
Upstream and downstream audio gain:	Programmable from OptiLogix API
Frequency response:	300-3400Hz (all compression modes)
Speech encoding/compression:	64kbit/s A-law (G.711), 36kbit/s proprietary encoding

Safety and EMI Certifications

Safety, emissions, immunity:	EN 60950, EN 55022, EN 55024
Compliance:	CE, FCC and RoHS 3
Estimated MTBF:	600.000 hours
Warranty:	2 years

The OptiLogix policy is one of continuous development and consequently the equipment may vary in detail from the description and specification in this publication